

Water purification pump small

PLEATED CARTRIDGES
 PLEATED - HIGH FLOW
 OD 6" (152 mm)

TECHNICAL DATA:

MAX. WORKING TEMPERATURE
 90 °C maximum

DIFFERENTIAL PRESSURE

Cartridge replacement:

1.5 bar @ 20 °C

Max. allowable:

2.4 bar @ 20 °C

1.8 bar @ 50 °C

CONSTRUCTION MATERIALS

Filter media:

- Polypropylène
- Fibre glass/polyester

Hardware:

- Polypropylene

Gaskets:

- Buna-n
- EPDM (standard)
- Viton
- Silicone
- FEP

DIMENSIONS

External diameter:



6" (152 mm)

Length:

20" (510 mm)

40" (1020 mm)

60" (1520 mm)

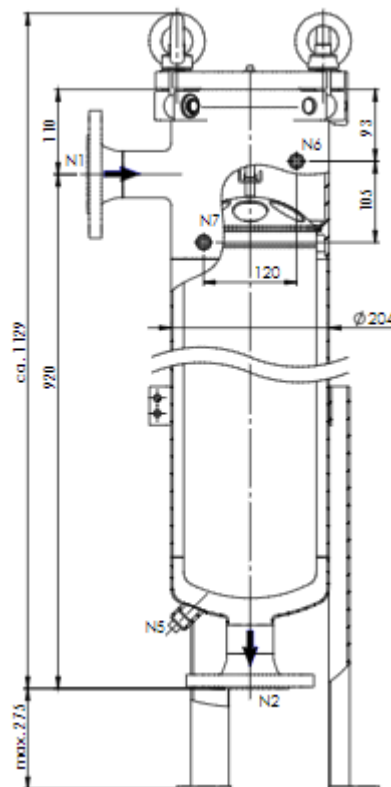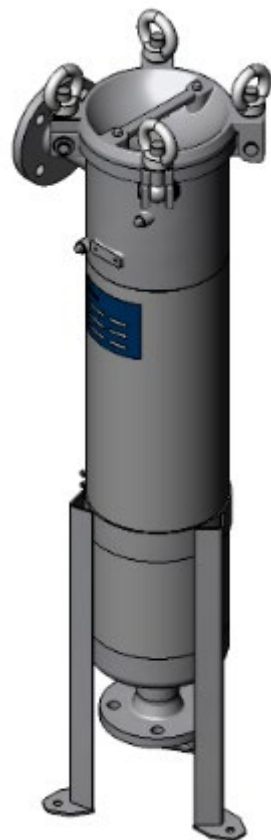

MAIN APPLICATIONS:

- DESALINATION
- WATER TREATMENT
- FINE CHEMICAL
- PETROCHEMICAL
- OIL & GAS
- FOOD & BEVERAGE
- POWER GENERATION
- PAINT AND RESINS
- PHARMACEUTICAL
- MICROELECTRONIC
- HYDRAULIC
- STEEL MILL
- GENERAL INDUSTRY

SPECIFICATION

Max. allow. Pressure	10 bar
Test Pressure	14.3 bar
Max. allow. Temperature	-10/+80°C
Volume	28 l
Material Housing	AISI 304
Material Gasket	O-Ring FPM
Material Bolts	Stainless Steel
Weight	39 kg



Water purification pump small